


HIGH POWER BROAD BAND LIMITERS

40 WATT CW, 0.5 - 12 GHz



- Low Limiting Threshold (+6 dBm Typical)
- 40 Watt CW and 200 Watt Peak (1 Microsec) power handling capability
- Built-in DC block @ input and output
- Hermetically sealed module
- Typical Recovery Time is less than 10 Microsec.

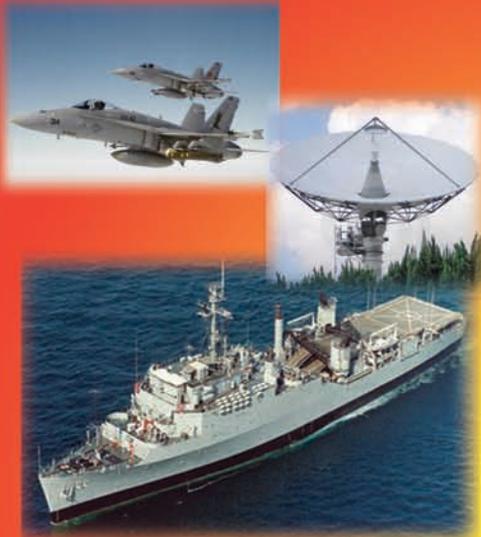

Typical Performance @ + 25 Deg. C.

MODEL	FREQUENCY RANGE (GHz)	MAXIMUM 1 INSERTION LOSS (dB)	MAX 1 VSWR	TYP LIM THRESHOLD (dBm)	MAX LEAKAGE	
					@ 1W CW INPUT (dBm)	@ 40 W CW ² INPUT (dBm)
LS0510P40B	0.5 - 1.0	0.5	1.4:1	+6	+14	+21
LS0520P40B	0.5 - 2.0	0.6	1.4:1	+6	+14	+21
LS0540P40B	0.5 - 4.0	0.8	1.4:1	+6	+14	+21
LS0560P40B	0.5 - 6.0	1.3	1.5:1	+6	+14	+21
LS05012P40B	0.5 - 12.0	1.7	1.7:1	+6	+14	+21
LS1020P40B	1.0 - 2.0	0.6	1.4:1	+6	+14	+21
LS1060P40B	1.0 - 6.0	1.2	1.5:1	+6	+14	+21
LS1012P40B	1.0 - 12.0	1.7	1.7:1	+6	+14	+21
LS2040P40B	2.0 - 4.0	0.7	1.4:1	+6	+14	+20
LS2060P40B	2.0 - 6.0	1.3	1.5:1	+6	+14	+20
LS2080P40B	2.0 - 8.0	1.5	1.6:1	+6	+14	+20
LS4080P40B	4.0 - 8.0	1.5	1.6:1	+6	+13	+20
LS7012P40B	7.0 - 12.0	1.7	1.7:1	+6	+13	+18

Note 1: Insertion loss and VSWR tested @ -10dBm

Note 2: Power rating derated to 20% @ + 125 Deg C.



Custom Designs: Please call for Detailed Brochures
 Other Herotek Products: Detectors, Amplifiers, Switches, Comb Generators, Impulse Generators, Multipliers, Integrated Subassemblies



155 Baytech Drive, San Jose, CA 95134 . Tel: (408) 941-8399 . Fax: (408) 941-8388
 Email: Info@herotek.com . Website: www.herotek.com . Visa/MasterCard Accepted